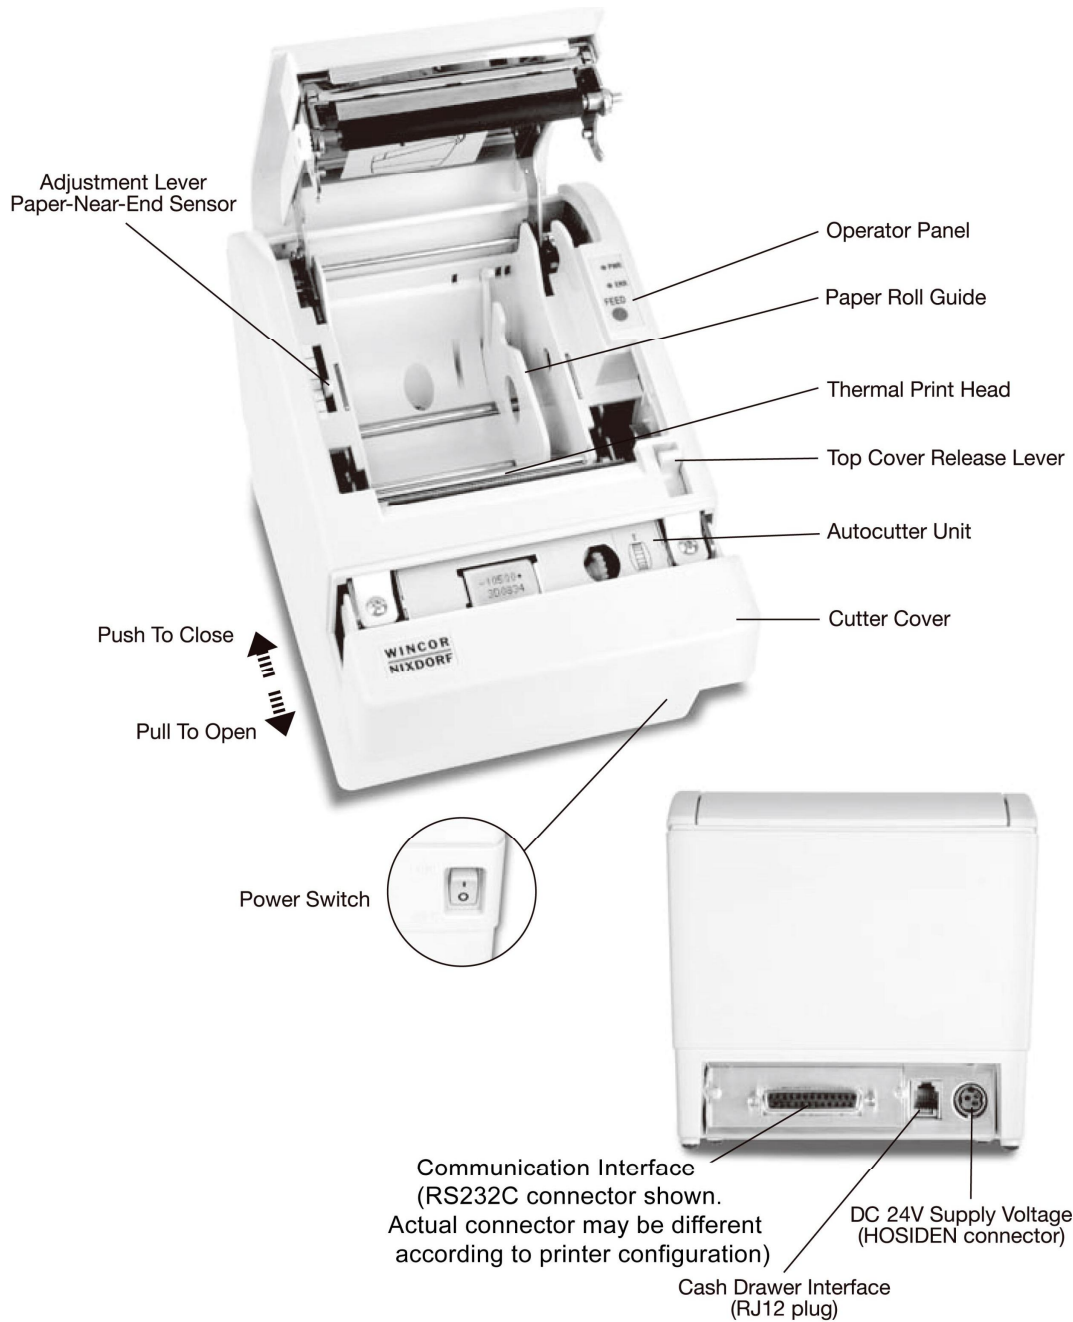# Overview Of The Printer

The TH200E thermal printer is a high-performance printer that is fast, quiet and reliable, yet easy to use. The printer is compact and will fit anywhere. Paper loading is simple with drop-in paper roll. It also comes with a cutter and cash drawer connections. With these convenient features, the TH200E is an essential supplement to you point-of-sale system!

Adjustment Lever
Paper-Near-End Sensor

Operator Panel

Paper Roll Guide

Thermal Print Head

Top Cover Release Lever

Autocutter Unit

Cutter Cover

Push To Close

Pull To Open

Power Switch

Communication Interface
(RS232C connector shown.
Actual connector may be different
according to printer configuration)

DC 24V Supply Voltage
(HOSIDEN connector)

Cash Drawer Interface
(RJ12 plug)

Features

Print Speed	150mm/s Maximum
Resident Character Sets	PC437 (US), PC850, PC860, PC863, PC865, PC852,PC858, WPC1252, PC866, Katakana, Thai (Standard English/Thai model) (Actual resident character sets may be different in other printer models)
Others Languages	Simplified Chinese, Traditional Chinese, Korean, Japanese, Hong Kong, Vietnamese
Integrated Bar Codes	Code 39, UPC-A, UPC-E, EAN-8, EAN-13, Codabar, Code 128
Printer Resolution	203dpi×180dpi(dots/inch)
Print Width	80mm, 640 Dot Positions
Configuration	Use FEED Button Menu
Flash Memory (Firmware)	1MB/2MB/4MB (model specific)
Flash Memory (Font/Logo)	64KB to 256KB (model specific)
Autocutter	Full Cut or Partial Cut
Interface Options	RS232C, Bi-Directional Parallel, USB 1.1, Ethernet (10 BASE-T)
Cash Drawer	Drive 1 or 2 Cash Drawers
Sensors	Cover Open, Paper-Near-End, Paper-End
Paper Roll Width	82.5mm/80mm/76mm/69.5mm/57.5mm selectable
Max Paper Roll Diameter	83mm
Others	Buzzer, Adjustable Paper-Near-End Sensor, Mark Sensor (certain models only)
Wall Mount	Optional- Wall Mount Kit
Colors	Light Grey, Black