


# Zebra® TTP 8000™ Series

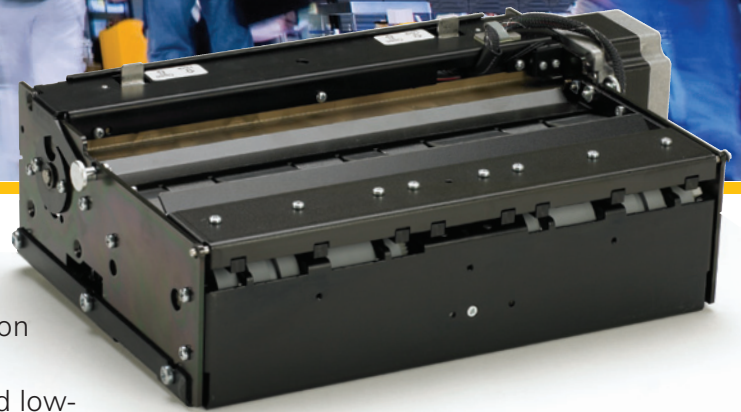

The TTP 8000 series kiosk printers offer 203-dpi resolution for full-format A4 or letter-size printouts of forms, bank statements, maps, or Web pages. The fast, compact and low-maintenance design makes these printers ideal for unattended environments. The pull detector and jam-preventing loop presenter provide trouble-free operation. The retract function keeps sensitive documents from being left behind outside the kiosk, and it saves media. If a printout is not taken from the printer, the output will be retracted, and the remaining information can be deleted from the queue, eliminating unwanted print jobs. The TTP 8200™ is available in three configurations for flexible kiosk integration: standard, compact, and vertical, each equipped with standard USB and parallel interfaces. For additional configuration flexibility, the media can be mounted either behind or below the printer. For applications requiring crisp images, Zebra offers the TTP 8300™ kiosk printer with 300-dpi resolution.

## Zebra Kiosk Receipt Printer Advantages

### Unremitting Reliability to Keep Kiosks Printing

Optimized for tough printing environments where durability, reliability and minimal maintenance and ease of use are critical, Zebra printers maximize uptime and minimize upkeep.

### Easy to Integrate in Kiosk Designs

A small footprint and flexible mounting options make Zebra printers ideal for a variety of applications—whether embedded in a custom kiosk solution or Zebra's Kiosk Print Station.

### End Benefits

As part of a self-service kiosk solution, Zebra printers help companies improve service, raise customer satisfaction, increase revenue, and lower operational costs.



# SPECIFICATIONS AT A GLANCE\*

## Printer models

TTP 8200 203-dpi (Horizontal, Vertical, or Compact),  
TTP 8300 300-dpi (Horizontal)

## Standard features

- Direct thermal receipt printing for A4 or letter size media
- Looping presenter with pull detector and retract & retain function (compact version does not have looping presenter, pull detector or retract function)
- Auto media loading
- Various media mounting options behind and below give flexibility to kiosk design, up to 9.84"/250 mm dia. media rolls
- USB and parallel connectivity standard
- 203- or 300-dpi printing
- Windows® drivers for plug and play
- Prints any font, code-page, bar code, and graphics supported by the operating system

## Printer specifications

### Resolution

203 dpi/8 dots per mm or 300 dpi/12 dots per mm

### Max print width

8.5"/216 mm or A4/210 mm

### Max print length

no limit

### Print speed

4"/100 mm per second

### Media sensors

Out-of-paper, paper in presenter, paper in retract path, black mark, and paper low reporting

## Media characteristics

### Paper width

- 8.5"/216 mm or A4 (8.27"/210 mm)
- Maximum media roll 9.84"/250 mm

### Media thickness

0.002"/0.054 mm to 0.004"/0.1 mm

### Media types

Roll or fanfold paper

## Operating characteristics

### Environmental

- Operating Temp.: 32° F/0° C to 122° F/50° C
- Storage Temp.: 14° F/-10° C to 122° F/50° C
- Operating Humidity: 35% to 75% non-condensing
- Storage Humidity: 10% to 90% non-condensing excluding paper

### Electrical

24Vdc +/-10% average 6A, peak 12A

## Physical characteristics

### Standard and Vertical

- Width: 11.3"/286 mm
- Height: 3.1"/78 mm
- Depth: 6.7"/171 mm
- Weight: 10.6 lbs/4.8 kg

### Compact

- Width: 11.1"/282 mm
- Height: 3.3"/84 mm
- Depth: 4.1"/103 mm
- Weight: 6.2 lbs/2.8 kg

## Fonts/graphics/symbologies

### Bar Codes

Code 39 internally, other symbologies can be printed via Windows® drivers

### Graphics

Logotypes and b&w BMP-files

### Standard fonts

ATM9 (Monospaced 14.4 cpi), up to 8 fonts can be uploaded

### Text attributes

Underline, bold, italics, reverse print, multiple width and height

## Communication and interface capabilities


Parallel IEEE-1284 and USB

## Operating system

Windows® 2000, XP, and Server 2003

## Options and accessories

- Roll Holder Behind, 8.5"/216 mm, includes paper-low sensor, 5.9"/150 mm dia. max
- Roll Holder Below, 8.5"/216 mm, includes paper-low and weekend sensors, 9.8"/250 mm dia. max
- Paper-low and weekend sensors with 15.7"/400 mm cable

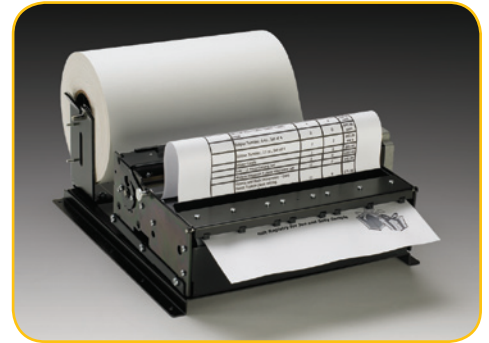

\*Specifications subject to change without notice.

©2009 ZIH Corp. All product names and numbers are Zebra trademarks, and Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. All rights reserved. Windows is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.



**ZEBRA**  
TECHNOLOGIES

www.zebra.com

### Corporate Headquarters

+1 800 423 0442  
inquiry4@zebra.com

### Asia-Pacific Headquarters

+65 6858 0722  
apacchannelmarketing@zebra.com

### EMEA Headquarters

+44 (0)1628 556000  
mseurope@zebra.com

### Latin America Headquarters

+1 847 955 2283  
inquiry4@zebra.com

### Other Locations

**USA:** California, Georgia, Rhode Island, Texas, Wisconsin **Europe:** France, Germany, Italy, Netherlands, Poland, Spain, Sweden **Asia Pacific:** Australia, China, India, Japan, South Korea **Latin America:** Argentina, Brazil, Florida (USA), Mexico **Africa/Middle East:** Russia, South Africa, United Arab Emirates

GSA#: GS-35F-0268N  
P1021845 (11/09)