

# The new DT-X30 with autofocus. Fast and high resolution delivery documentation guaranteed.



- Windows® CE®6.0, Windows® Mobile 6.1
- 2 Mega pixel digital camera with autofocus
- GPRS/EDGE and GPS integrated
- Wireless LAN, Bluetooth
- 2D imager or laser scanner
- Drop protection 1,8 m, ingress protection IP67
- Human-Centered Design

# CASIO DT-X30

Reliable and complete tracking and tracing as well as delivery documentation in real-time become increasingly important nowadays. Fast and mobile data exchange, efficient route planning, online routing and real-time information of vehicle positions are essential success factors.

The new CASIO DT-X30 is the perfect MDA terminal for delivery companies, express services and even manufacturers and retailers who distribute the products themselves. Developed with a Human-Centred design approach the device offers the complete range of mobile data communication. Thereby the 2 mega pixel digital camera with autofocus guarantees high resolution pictures of signatures on delivery notes, transport damages and so on.

## Wireless data communication in real-time

The new CASIO DT-X30 offers all possibilities for a quick and efficient data exchange between service or delivery staff and head office management. Via



WWAN (EDGE, GPRS, GSM), WLAN (IEEE802.11b/g) and Bluetooth. In addition the actual position can be displayed via GPS. This is the ideal basis for the improvement of service quality, increase of efficiency and reduction of petrol costs.

## Microsoft Windows Embedded or Mobile

The DT-X30 works with a PXA320 processor with 624MHz clock speed, 128 MB RAM, 128 MB ROM and the hardware independent operation system Windows Embedded CE 6.0 R2 or Windows Mobile 6.1. This is an excellent basis for the development of customized software solutions as well as the integration of existing applications.



## Ergonomic, light and therefore extremely robust

The DT-X30 was developed to withstand the roughest working conditions. Dust and water immersion protection according to IP67 and the working temperatures of -20° to +50° C allow the usage in rain, snow or other wet environments as well as strong heat. Rough handling with possible thrusts and hits are also no problem: The DT-X30 survives drops from 1,8 meters on concrete.

## Perfectly prepared for versatile application areas


The DT-X30 feels at home where mobile real-time communication and image capturing is needed. Inside as well as outside. The serial performance and features on

top of the ergonomic design add up to a high quality and reliable all-round product for diverse and challenging applications.



## 2.0 mega pixel digital camera with autofocus and flash

The effectiveness of the digital camera is a unique characteristic of the DT-X30. From a signed delivery note or a damaged parcel to current meter readings of a heating system or the picture proof of a parking violation: The DT-X30 takes pictures of all motives fast, focused and reliable with the 2 mega pixel digital camera with autofocus and flash. The pictures can be submitted immediately to the head office using the integrated WWAN module. If necessary GPS location information, daytime and date can be added to the pictures.

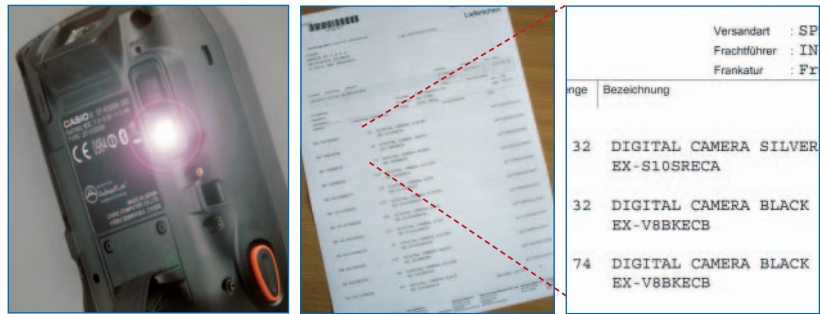

## 8,89 cm transfective colour touch screen, CMOS imager or laser scanner



The 8,89 cm transfective colour LCD is produced by CASIO. A user friendly data input and signature capturing method can be done with the touch pen and scratch-resistant touch screen of the device. No matter if glaring sunlight or night delivery – the graphic display with 240x320 pixels is readable under all light conditions.

Of course data can also be captured by using the powerful and efficient laser scanner or CMOS imager. This includes also two dimensional codes with high data loads like DataMatrix, Aztec and PDF417.

### General Guide / Options



# CASIO DT-X30

Modell	DT-X30R-10	DT-X30GR-10	DT-X30GR-10C	DT-X30R-30	DT-X30GR-30	DT-X30GR-30C	DT-X30R-15	DT-X30GR-15	DT-X30GR-15C	DT-X30R-35	DT-X30GR-35	DT-X30GR-35C
Windows CE	X	X	X	X	X	X						
Windows Mobile							X	X	X	X	X	X
Laserscanner	X	X	X				X	X	X			
CMOS Imager				X	X	X				X	X	X
802.11b/g	X	X	X	X	X	X	X	X	X	X	X	X
Bluetooth	X	X	X	X	X	X	X	X	X	X	X	X
GPRS		X	X		X	X		X	X		X	X
GPS		X	X		X	X		X	X		X	X
Camera			X			X			X			X

## Specifications

Model-DT X30			GR-30C	GR-35C	GR-30	GR-35	R-30	R-35	GR-10C	GR-15C	GR-10	GR-15	R-10	R-15		
CPU			PXA320 624MHz													
OS			Win CE*	Win Mobile**	*	**	*	**	*	**	*	**	*	**		
Memory	RAM		128MB													
	F-ROM		128MB													
Scanner/ CMOS Imager	Type		CMOS-Imager						Laserscanner							
	Resolution		1D: 0,15 mm, Stacked: 50-250mm Matrix: 60-150 mm						0,127 mm							
	Readable Distance		1D: 0,15 mm, Stacked: 50-250mm Matrix: 60-150 mm						40-400 mm							
	Readable Symbologies	1D	GS1 DataBar Omnidirectional (RSS-14), GS1 DataBar (RSS-14) Truncated, GS1 DataBar (RSS) Limited, GS1 DataBar (RSS) Expanded, GS1-128 (UCC/EAN128),Code128, Code93, Code39, Code11, EAN, UPC A/E, Codabar (NW7), ITF, MSI (Plessey), IATA, ISBTGS1						DataBar Omnidirectional (RSS-14), GS1 DataBar (RSS-14) Truncated, GS1 DataBar (RSS) Limited, GS1 DataBar (RSS) Expanded, GS1-128 (UCC/EAN128),Code128, Code93, Code39, EAN, UPC A/E, Codabar (NW7), ITF, MSI (Plessey), IATA, Industrial 2 of 5							
		Stacked	GS1 DataBar (RSS-14) Stacked GS1 DataBar (RSS-14) Stacked Omnidirectional , GS1 DataBar (RSS) Expanded Stacked, Code49, PDF417, Micro PDF, Composite, Codablock F, TLC39						GS1 DataBar (RSS-14) Stacked, GS1 DataBar (RSS-14) Stacked Omnidirectional, GS1 DataBar (RSS) Expanded Stacked							
Matrix		Aztec, DataMatrix, Maxicode, QR Code						-								
Display	CASIO-Super-LCD		Transflective TFT, Color-LCD Display													
	Dimension		8,89 cm, Resolution: 240x320 QVGA, 65.536 Colors													
	Backlight		LED Technology													
Input	Keyboard		31 keys, 3 Scanner keys (Center, Left & Right), colored F1-F4 keys													
Digital Camera	Imaging Element		2.0M Pixels CMOS	-			-			2.0M Pixels CMOS	-			-		
	Focusing		Autofocus	-			-			Autofokus	-			-		
	Other Function		LED Flash	-			-			LED-Licht	-			-		
GPS			Integrated						-			Integrated			-	
Inter- faces	Wireless	WAN	EDGE/GPRS/ GSM			-			EDGE/GPRS/ GSM			-				
		LAN	IEEE802.11b (maximum:11 Mbps), IEEE802.11g (maximum: 54 Mbps)													
		PAN	Bluetooth Version 2.0 + EDR													
	SD-Slot	MicroSD (SDHC) slot x 1														
	Infrarot	IrDA 1.3 Low power (maximum: 4Mbps)														
	Seriell	USB (Host / Client) (using the cradle)														
Audio			Buzzer, Lautsprecher (mono), Mikrofon (mono)													
Power	DT-X30		Lithium-ion battery pack (7.4V / 2,000mAh): ca. 18 hours													
Supply	Memory Backup		Lithium battery (rechargeable) on board													
Dimensions			Approx.59.0 (87.0*) (B) x 242 (L) x 46.0 (49.0**) (H) mm * the figure indicates the display part. / ** Display outside													
Weight			Approx. 595g	Approx. 590g			Approx. 550g			Approx. 595g	Approx. 590g			Approx.550g		
Durability	Water/Splash-proof		IP67													
	Drop Durability		1,8m													
	Operating Temperature		-20 °C to 50 °C													



Windows® and Windows® Embedded are registered trademarks of the Microsoft Corporation, USA. The Bluetooth trademark is owned by Bluetooth SIG, USA and licensed to Casio Computer Co. Ltd.. Other product- or company names are either trademarks or registered trademarks of the respective owners. This publication carries product description without obligation and is not to be seen as a firm offer. Specifications and design are subject to change without notice.

CASIO Europe GmbH · Mobile Industrial Solutions · CASIO-Platz 1 · D-22848 Norderstedt  
Tel.: +49 (0)40 - 52 86 5-407 · Fax: +49 (0)40 - 52 86 5-424 · E-Mail: solutions@casio.de · www.casio-b2b.com